


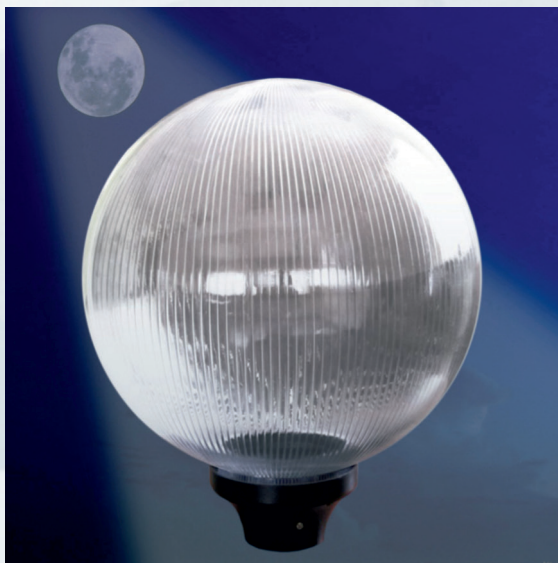

STREET LAMP ДТУ03 MOON


TY BY 191039087.002-2010

Designation

Decorative lamp for lighting urban outdoor areas (streets, parks, squares, gardens)

Advantages

- Classic lamp body design with good light transmission coefficient
- The dissector is made of light-stabilized PMMA
- High lamp body moisture and dust protection (IP54)

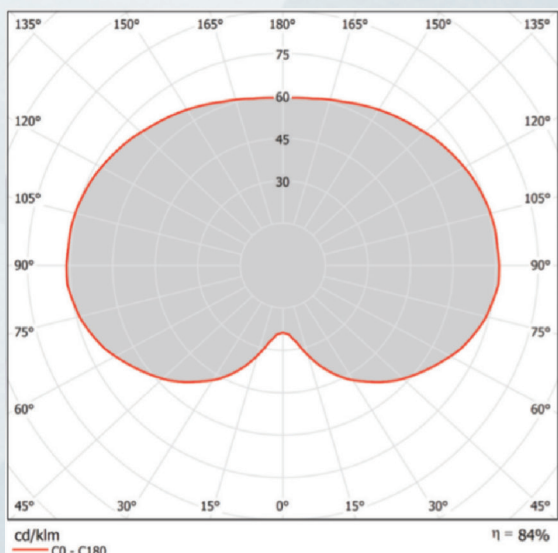

Name	Lamp Type	Power	Efficiency	Base	Overall dimensions	Weight
ДТУ 03-30-001	LED*	30	90	E27	397x482	3,8
ДТУ 03-30-002	LED*	30	90	E27	397x482	3,8
ДТУ 03-40-001	LED*	40	90	E40/E27	397x482	3,8
ДТУ 03-40-002	LED*	40	90	E40/E27	397x482	3,8
ДТУ 03-50-001	LED*	50	90	E40/E27	397x482	3,8
ДТУ 03-50-002	LED*	50	90	E40/E27	397x482	3,8
ДТУ 03-20-001	LED-модуль	20	90	—	397x482	3,8
ДТУ 03-20-002	LED-модуль	20	90	—	397x482	3,8
ДТУ 03-35-001	LED-модуль	35	90	—	397x482	3,8
ДТУ 03-35-002	LED-модуль	35	90	—	397x482	3,8

*where overall dimensions of the lamp should not exceed (ØxH) 125x350 mm

230B
50Гц

УХЛ1

IP54



U.V.



The holder body (base) is made of polycarbonate.

Dissector - lighting UV stabilized PMMA


Type of dissector:

Model 001 – milky white

Model 002 – prismatic

Installation, maintenance

Installed on 57 mm support and fixed with bolts. To replace the lamp, unscrew the dissector.

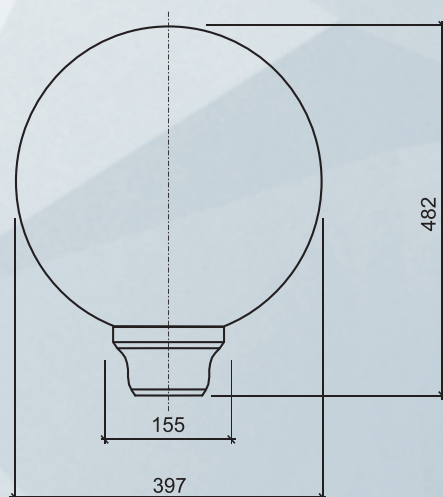

Utilization factors

Lamp	B/H ratio									
	0,2	0,3	0,5	0,7	1,1	1,5	2	3	5	10
Location on the side of the street										
ДТУ03-001	0,02	0,03	0,06	0,08	0,11	0,13	0,15	0,18	0,19	0,21
ДТУ03-002	0,02	0,03	0,05	0,08	0,12	0,14	0,17	0,19	0,21	0,23
Location in the center of the street										
ДТУ03-001	0,02	0,03	0,06	0,08	0,12	0,16	0,20	0,26	0,33	0,39
ДТУ03-002	0,02	0,03	0,05	0,08	0,12	0,16	0,21	0,29	0,37	0,43

B – width of street, road
H – height of the lamp installation

