



TY BY 191039087.004-2011

Designation

Metal lighting support for parks, gardens and streets.

DESIGN:

Steel support
OM10a - anchor

PROTECTIVE COATING

Model OM10(xц)a – cold zinc coating.
Model OM10(o)a – hot zinc coating. Hot zinc coated products can be painted upon customer request.

Color on request (according to the international RAL palette).

EQUIPMENT:

1. LED lamp 20-90 W (LDC-wide, secondary optics-lenses)
2. Cable on request.
3. Entry panel (see pages 104-105) – on request
4. Embedded element is a separate item.




230В 50Гц
УХЛ1

PARAMETER SHEET OM10a

Type of support	H,м	L1×L2,мм	Weight, kg	Anchor	Foundation block
OM10a-1-4,0-150x150	4,0	360×90	145	Ша 20x4x1500(1)	ФБ-2-L-1500(1)
OM10a-1-5,0-150x150	5,0		172		
OM10a-1-6,0-150x150	6,0		199		
OM10a-1-7,0-150x150	7,0		229	Ша 20x4x1700(1)	
OM10a-1-8,0-150x150	8,0		258		
OM10a-1-9,0-150x150	9,0		288		



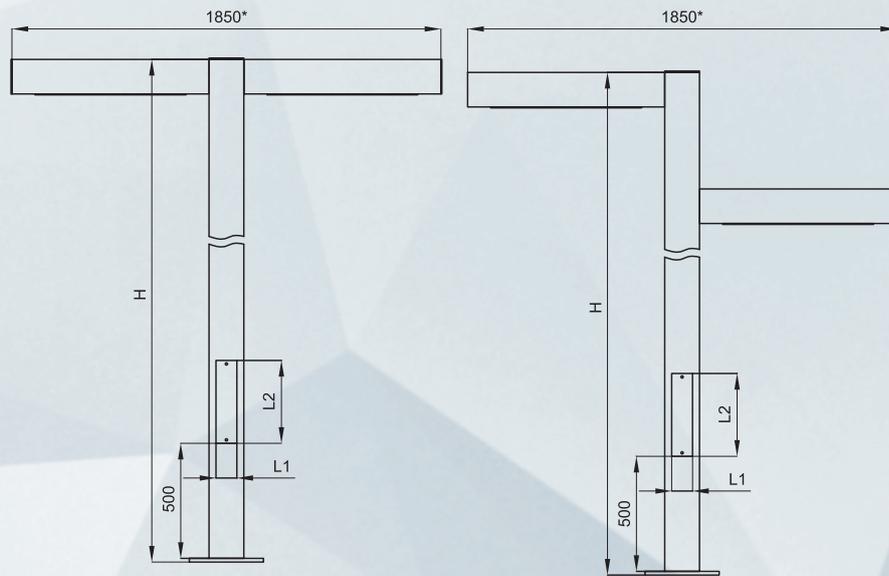

PARAMETER SHEET OM10a

Type of support	H, M	L1×L2, MM	Weight, kg	Anchor	Foundation block
OM10a-2-4,0-150x150	4,0	360×90	165	Ша 20x4x1500(1)	ФБ-2-L-1500(1)
OM10a-2-5,0-150x150	5,0		192		
OM10a-2-6,0-150x150	6,0		219		
OM10a-2-7,0-150x150	7,0		249		
OM10a-2-8,0-150x150	8,0		278		
OM10a-2-9,0-150x150	9,0		308		
OM10a-2-3,0-80x80	3,0	-	72	Ша 20x4x1500(1)	
OM10a-2-4,0-80x80	4,0		79		
OM10a-2-5,0-80x80	5,0		84		
OM10a-2-6,0-80x80	6,0		89		