

Designation

Metal lighting support for streets, gardens, parks, squares.

DESIGN:

OM21 – buried.

OM21a – anchor

Anchor block is a separate item




PROTECTIVE COATING

Model OM21(xц) – anti-corrosion oldizinc™ and decorative coating.

*see application process and description on page 2
Color on request (according to the international RAL palette).

EQUIPMENT:

1. LED Lamp / LED Module
2. Polycarbonate transparent protective pipe (mat pipe is an option)
3. Entry panel on request (see pages 104-105)

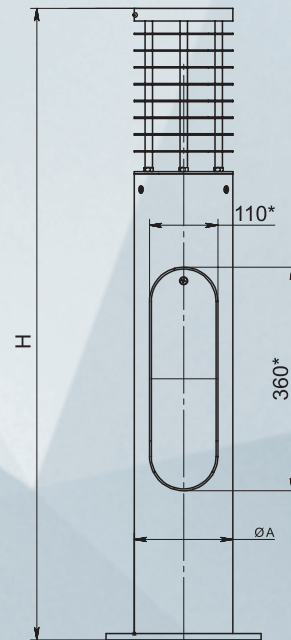

PARAMETER SHEET OM21

Type of structure	H, мм	D, мм	ØA, мм	Weight, kg
OM21-1-1.0-159	1000	500	159	24.9
OM21-1-1.5-159	1500	500	159	32.8
OM21a-1-1.0-159	1000	–	159	19.3
OM21a-1-1.5-159	1500	–	159	27.0

*Support height is modified on agreement with customer.

Name	Lamp Type	Power, W	Efficiency	Base
OM21	LED*	30	90	E27
OM21	LED*	40	90	E40/E27
OM21	LED*	50	90	E40/E27

*where overall dimensions of the lamp should not exceed Ø= 95 mm

