



TY BY 191039087.004-2011

Designation

Metal lighting support for streets, gardens, parks, squares.

DESIGN:

OM22a – anchor



Anchor block is a separate item

PROTECTIVE COATING

Model OM22(xu) – anti-corrosion oldizinc™ and decorative coating.


*see application process and description on page 2

Color on request (according to the international RAL palette).

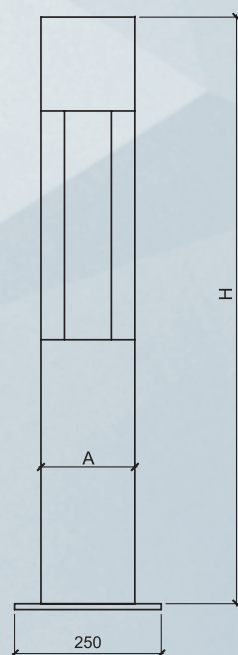

EQUIPMENT:

1. LED Lamp / LED Module
2. Cable on request
3. Entry panel on request (see pages 104-105)
4. Embedded element is a separate item.



PARAMETER SHEET OM22a

| Type of support | H,м | A,мм | Weight, kg |
|-----------------|-----|------|------------|
| OM22a-1-1,0-150 | 1,0 | 150 | 13,9 |
| OM22a-1-1,5-150 | 1,5 | 150 | 20,9 |
| OM22a-1-3,0-150 | 3,0 | 150 | 40,1 |

*Support height is modified on agreement with customer.

| Name | Lamp Type | Power, W | Efficiency |
|------|---------------|----------|------------|
| OM22 | LED-модуль | 25 | 90 |
| OM22 | LED-прожектор | 20 | 90 |
| OM22 | LED-прожектор | 30 | 90 |