



TY BY 191039087.004-2011

Designation

Metal lighting support for streets, parks, squares.


DESIGN:

Steel support
OM24a - anchor

PROTECTIVE COATING


Model OM24(хц)a – oldizinc™ coating and painting with RAL finishing layer.

Model OM24(о)a – hot zinc coating. Hot zinc coated products are painted with RAL finishing layer or covered with polymer coating. Color on request (according to the international RAL palette).

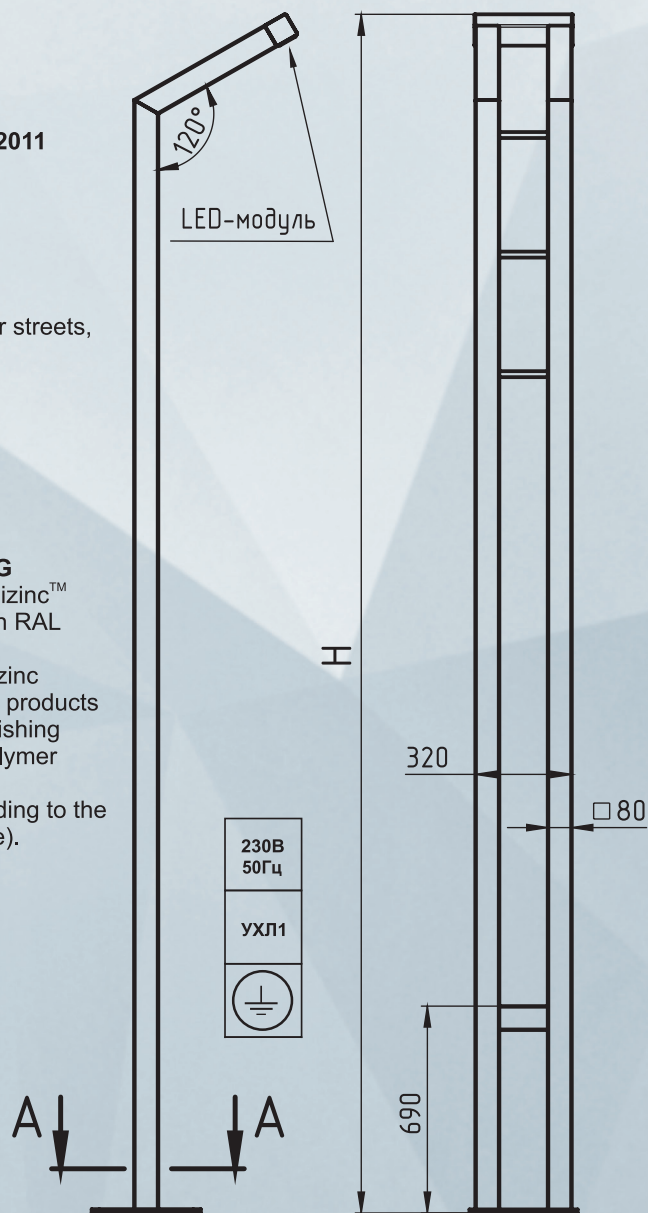

EQUIPMENT:

1. LED lamp 20-60 W (secondary optics – lenses)
2. Cable on request
3. Entry panel on request (see pages 104-105)
4. Embedded element is a separate item.



PARAMETER SHEET OM24a

Type of support	H, м	L1×L2, мм	Weight, kg	Anchor	Foundation block
OM24a-1-3,0-80x80	3,0	—	72	Ша 20×4×1500(1)	ФБ-2-L-1500(1)
OM24a-1-3,5-80x80	3,5		77,5		
OM24a-1-4,0-80x80	4,0		83		
OM24a-2-3,0-80x80	3,0		82		
OM24a-2-3,5-80x80	3,5		87,5		
OM24a-2-4,0-80x80	4,0		93		

