



TY BY 191039087.007-2015

**Designation**

Lighting of the areas, remote from power grids. Design of each support depends on the installed equipment and the maximum gust of wind at the installation site.

**DESIGN:**


Round support – anchor;  
Support shaft 6 -9 m high

**PROTECTIVE COATING**

Model OCБ(o) – hot zinc coating.  
Model OCБ(xu) – cold zinc coating.

**EQUIPMENT:**

1. Cable – on request.
2. Entry panel (see pages 104-105) – on request.
3. Embedded element is a separate item.

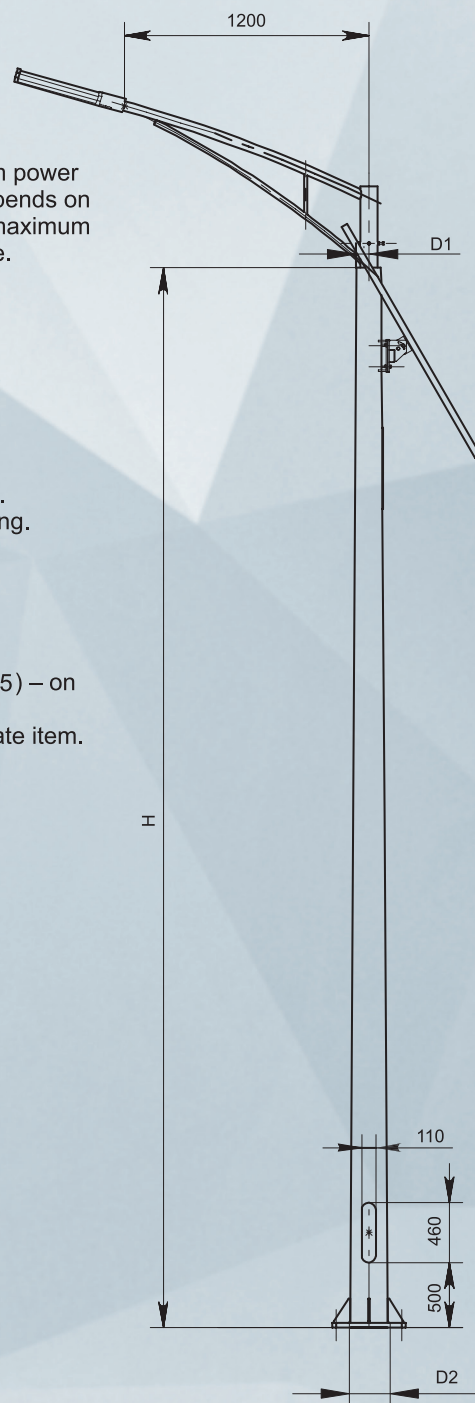

| H   | D1 | D2  | L1×L2   | a×b     | Weight / thickness |       | Anchor         | Foundation block | Foundation load |       |
|-----|----|-----|---------|---------|--------------------|-------|----------------|------------------|-----------------|-------|
|     |    |     |         |         | кг                 | мм    |                |                  | M, кНхм         | Q, кН |
| 6,0 | 72 | 144 | 460×110 | 360×270 | 4                  | 120,6 | Ща20x4x1500(1) | ФБ-2-L-1500(1)   | 6,64            | 2,02  |
| 7,0 |    | 156 |         |         |                    |       |                |                  | 8,63            | 2,39  |
| 8,0 |    | 168 |         |         |                    |       |                |                  | 11,62           | 2,61  |
| 9,0 |    | 180 |         |         |                    |       |                |                  | 14,61           | 2,83  |