



TY BY 191039087.007-2015

CKO round

DESIGN:

Folding round support – anchor;
Support shaft 5 -10 m high

PROTECTIVE COATING

Model CKO(o) – hot zinc coating. Hot zinc coated products can be covered with RAL finishing layer upon customer request. Color on request (according to the international RAL palette).

EQUIPMENT:

1. Cable – on request
2. Entry panel (see pages 100-101) – on request
3. Embedded part is a separate item

CGO faceted

DESIGN:


Folding faceted – anchor;
Support shaft 5 -10 m high

PROTECTIVE COATING

Model CGO(o) – hot zinc coating. Hot zinc coated products can be covered with RAL finishing layer upon customer request. Color on request (according to the international RAL palette).

EQUIPMENT:

1. Cable – on request
2. Entry panel (see pages 104-105) – on request
3. Embedded part is a separate item

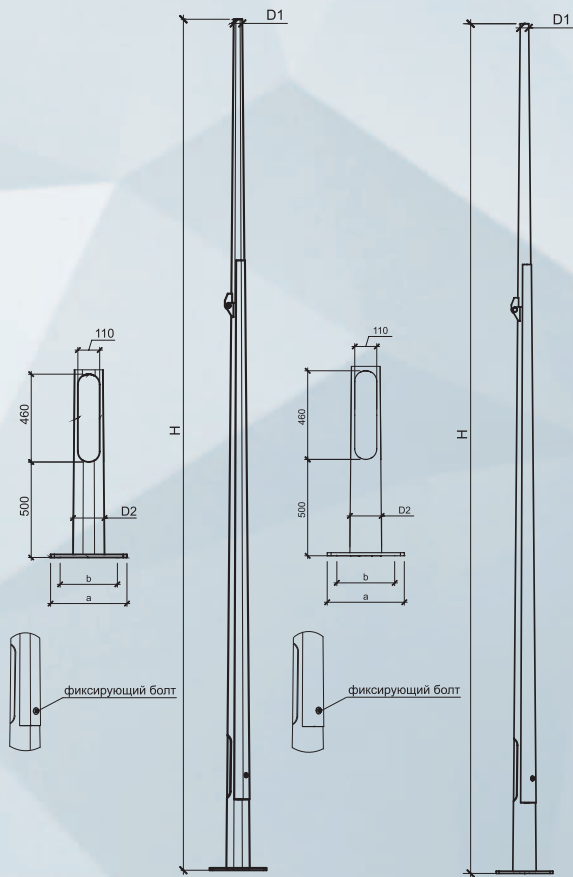

PARAMETER SHEET CKO (ROUND)

H	D1	D2	L1×L2	a×b	Weight / thickness		Anchor	Foundation block	Foundation load	
					КГ	ММ			M, кН×м	Q, кН
5,0	120	60	360×90	250×180	120,1	3	Ша 16×4×1200	ФБ-2-L-1200	5,64	2,17
6,0	132				132,7				8,63	2,39
7,0	144				148,9				11,62	2,61
8,0	156	60	460×110	360×270	164,2	4	Ша 20×4×1500(1)	ФБ-2-L-1500(1)	14,61	2,83
9,0	168				180,5				17,6	3,04
10,0	180				200,2				20,74	3,26

PARAMETER SHEET CGO (FACETED)

H	D1	D2	L1×L2	a×b	Weight / thickness		Anchor	Foundation block	Foundation load	
					КГ	ММ			M, кН×м	Q, кН
5,0	120	60	360×90	250×180	128,2	3	Ша 16×4×1200	ФБ-2-L-1200	5,67	2,18
6,0	132				140,6				8,66	2,41
7,0	144				156,6				11,68	2,64
8,0	156	60	460×110	360×270	172,4	4	Ша 20×4×1500(1)	ФБ-2-L-1500(1)	14,64	2,85
9,0	168				188,3				17,63	3,07
10,0	180				208,1				20,77	3,29